

Metal Outdoor Bullet Camera

KEY FEATURES

- True Day/Night,IR range: 30 ~ 35m
- OSD menu, DNR, Smart IR,ICR,UTC
- Wide Voltage,DWDR
- Surge protection
- DC12V,IP67



MP-L4IH500F-A	MP-L4IH400F-A	MP-L4IH203F-A	MP-L4IA206F	MP-L4IA101F
HD 5MP 4-IN-1 one-button switching · 1/2.5" high-performance CMOS · 4mm Lens/5.0MP	HD 4MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.1MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 2.0MP · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 1.0MP · 1/4" high-performance CMOS · 3.6mm Lens/2.0MP

KEY FEATURES

- True Day/Night,IR range: 30 ~ 35m
- OSD menu, DNR, Smart IR,ICR,UTC
- Wide Voltage,DWDR
- Surge protection
- DC12V,IP67



MP-L3DH500F-A	MP-L3DH400F-A	MP-L3DH203F-A	MP-L3DA206F	MP-L3DA101F
HD 5MP 4-IN-1 one-button switching · 1/2.5" high-performance CMOS · 4mm Lens/5.0MP	HD 4MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.1MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 2.0MP · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 1.0MP · 1/4" high-performance CMOS · 3.6mm Lens/2.0MP

KEY FEATURES

- True Day/Night,IR range: 30 ~ 35m
- OSD menu, DNR, Smart IR,ICR,UTC
- Wide Voltage,DWDR
- Surge protection
- DC12V,IP67



MP-L2HH500F-A	MP-L2HH400F-A	MP-L2HH203F-A	MP-L2HA206F	MP-L2HA101F
HD 5MP 4-IN-1 one-button switching · 1/2.5" high-performance CMOS · 4mm Lens/5.0MP	HD 4MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.1MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 2.0MP · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 1.0MP · 1/4" high-performance CMOS · 3.6mm Lens/2.0MP

KEY FEATURES

- True Day/Night,IR range: 30 ~ 35m | 35 ~ 45m
- OSD menu, DNR, Smart IR,ICR,UTC
- Wide Voltage,DWDR
- Surge protection
- DC12V,IP67



MP-L4FH500F-A	MP-L4FH400F-A	MP-L4FH203F-A	MP-L4FA206F	MP-L4FA101F
HD 5MP 4-IN-1 one-button switching · 1/2.5" high-performance CMOS · 4mm Lens/5.0MP	HD 4MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.1MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 2.0MP · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 1.0MP · 1/4" high-performance CMOS · 3.6mm Lens/2.0MP

MP-L8FH500F-A	MP-L8FH400F-A	MP-L8FH203F-A	MP-L8FA206F	MP-L8FA101F
HD 5MP 4-IN-1 one-button switching · 1/2.5" high-performance CMOS · 4mm Lens/5.0MP	HD 4MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.1MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 2.0MP · 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	AHD 1.0MP · 1/4" high-performance CMOS · 3.6mm Lens/2.0MP

KEY FEATURES

- True Day/Night,IR range: 35 ~ 45m
- OSD menu, DNR, Smart IR,ICR,UTC
- Wide Voltage,DWDR
- Surge protection
- DC12V,IP67



MP-L9DH500V-A	MP-L9DH400V-A	MP-L9DH203V-A	MP-L9DA206V	MP-L9DA101V
HD 5MP 4-IN-1 one-button switching · 1/2.5" high-performance CMOS · Varifocal 2.7-12mm Lens/5.0MP	HD 4MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.1MP 4-IN-1 one-button switching · 1/2.7" high-performance CMOS · Varifocal 2.8-12mm Lens/3.0MP	AHD 2.0MP · Varifocal 2.8-12mm Lens/3.0MP	AHD 1.0MP · 1/4" high-performance CMOS · Varifocal 2.8-12mm Lens/2.0MP

Plastic Indoor Dome Camera

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night,IR range: 20 ~ 25m
- 3.6mm Lens/5.0MP
- OSD menu, DNR, Smart IR,ICR
- Wide Voltage,UTC
- Surge protection
- 12VDC



MP-Q1VH504F-B	MP-Q1VH403F-B	MP-Q1VH241F-B	MP-Q1VH205F-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 3.6mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 3.6mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 3.6mm Lens/3.0MP

Metal Indoor Dome Camera

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night,IR range: 20 ~ 25m
- OSD menu, DNR, Smart IR,ICR
- Wide Voltage,UTC
- Surge protection
- DC12V,IP66



MP-M1AH504F-B	MP-M1AH403F-B	MP-M1AH241F-B	MP-M1AH205F-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 3.6mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 3.6mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 3.6mm Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night,IR range: 30 ~ 40m
- OSD menu, DNR, Smart IR,ICR
- Wide Voltage,UTC
- Surge protection
- DC12V,IP66



MP-M9AH504V-B	MP-M9AH403V-B	MP-M9AH241V-B	MP-M9AH205V-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · Varifocal 2.8-12mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · Varifocal 2.8-12mm Lens/5.0MP	HD 2.1MP 4-IN-1 · 1/2.8" high-performance CMOS · Varifocal 2.8-12mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · Varifocal 2.8-12mm Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night,IR range: 30 ~ 40m
- OSD menu, DNR, Smart IR,ICR
- Wide Voltage,UTC
- Surge protection
- DC12V,IP66



MP-M2AH504M-B	MP-M2AH241M-B	MP-M2AH205M-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 2.7-12mm Motorized Lens/5.0MP	HD 2.1MP 4-IN-1 · 1/2.8" high-performance CMOS · 2.8-12mm Motorized Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 2.8-12mm Motorized Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night,IR range: 25 ~ 30m
- OSD menu, DNR, Smart IR,ICR
- Wide Voltage,UTC
- Surge protection
- DC12V,IP67



MP-F1DH504F-B	MP-F1DH403F-B	MP-F1DH241F-B	MP-F1DH205F-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 3.6mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 3.6mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 3.6mm Lens/3.0MP

Metal Indoor Dome Camera

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- OSD menu, DNR, Smart IR,ICR
- IR range: 20 ~ 25m
- Wide Voltage,UTC
- Surge protection
- DC12V,IP67



MP-F5BH504F-B	MP-F5BH403F-B	MP-F5BH241F-B	MP-F1DH205F-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 3.6mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 3.6mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 3.6mm Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night,IR range: 30 ~ 40m
- OSD menu, DNR, Smart IR,ICR
- Wide Voltage,UTC
- Surge protection
- DC12V,IP67



MP-F5AH504V-B	MP-F5AH403V-B	MP-F5AH241V-B	MP-F5AH205V-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · Varifocal 2.8-12mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · Varifocal 2.8-12mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · Varifocal 2.8-12mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · Varifocal 2.8-12mm Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night,IR range: 30 ~ 40m
- OSD menu, DNR, Smart IR,ICR
- Wide Voltage,UTC
- Surge protection
- DC12V,IP67, Junction box



MP-F5CH504V-B	MP-F5CH403V-B	MP-F5CH241V-B	MP-F5CH205V-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · Varifocal 2.8-12mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · Varifocal 2.8-12mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.7" high-performance CMOS · Varifocal 2.8-12mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · Varifocal 2.8-12mm Lens/3.0MP

Metal Outdoor Bullet Camera

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night,IR range: 30 ~ 35m
- 3.6mm Lens/5.0MP
- OSD menu, DNR, Smart IR,ICR
- Wide Voltage,UTC
- Surge protection
- DC12V,IP67



MP-L1QH504F-B	MP-L1QH403F-B	MP-L1QH241F-B	MP-L1QH205F-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 3.6mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 3.6mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 3.6mm Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night,IR range: 30 ~ 35m
- OSD menu, DNR, Smart IR,ICR
- Wide Voltage,UTC
- Surge protection
- DC12V,IP67



MP-L2QH504F-B	MP-L2QH403F-B	MP-L2QH241F-B	MP-L2QH205F-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 3.6mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 3.6mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 3.6mm Lens/3.0MP

Metal Indoor Dome Camera

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night, IR range: 30 ~ 40m
- OSD menu, DNR, Smart IR, ICR
- Wide Voltage, UTC
- Surge protection
- DC12V, IP67



KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night, IR range: 30 ~ 40m
- OSD menu, DNR, Smart IR, ICR
- Wide Voltage, UTC
- Surge protection
- DC12V, IP67, Junction box



MP-F5AH504M-B	MP-F5AH241M-B	MP-F5AH205M-B	MP-F5CH504M-B	MP-F5CH241M-B	MP-F5CH205M-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 2.8-12mm Motorized Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 2.8-12mm Motorized Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 2.8-12mm Motorized Lens/3.0MP	HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 2.8-12mm Motorized Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 2.8-12mm Motorized Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 2.8-12mm Motorized Lens/3.0MP

Metal Outdoor Bullet Camera

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night, IR range: 30 ~ 35m
- OSD menu, DNR, Smart IR, ICR
- Wide Voltage, UTC
- Surge protection
- DC12V, IP67



MP-L2JH504F-B	MP-L2JH403F-B	MP-L2JH241F-B	MP-L2JH205F-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 3.6mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · 3.6mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 3.6mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 3.6mm Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night, Color: 0.01Lux @F1.2, B/W: 0Lux with IR on, True WDR
- OSD menu, DNR, Smart IR, ICR
- IR range: 35 ~ 45m
- Wide Voltage, UTC
- Surge protection
- DC12V, IP67



MP-L8QH504V-B	MP-L8QH403V-B	MP-L8QH241V-B	MP-L8QH205V-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · Varifocal 2.7-12mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · Varifocal 2.8-12mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · Varifocal 2.8-12mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · Varifocal 2.8-12mm Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night, IR range: 35 ~ 45m
- Varifocal 2.7-12mm Lens/5.0MP
- OSD menu, DNR, Smart IR, ICR
- Wide Voltage, UTC
- Surge protection
- DC12V, IP67



MP-L9GH504V-B	MP-L9GH403V-B	MP-L9GH241V-B	MP-L9GH205V-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · Varifocal 2.7-12mm Lens/5.0MP	HD 4.0MP 4-IN-1 · 1/3" high-performance CMOS · Varifocal 2.8-12mm Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · Varifocal 2.8-12mm Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · Varifocal 2.8-12mm Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night, IR range: 35 ~ 45m
- OSD menu, DNR, Smart IR, ICR
- Wide Voltage, UTC
- Surge protection
- DC12V, IP67



MP-L8AH504M-B	MP-L8AH241M-B	MP-L8AH205M-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 2.8-12mm Motorized Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 2.8-12mm Motorized Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 2.8-12mm Motorized Lens/3.0MP

Metal Outdoor Bullet Camera

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night, IR range: 40 ~ 50m
- OSD menu, DNR, Smart IR, ICR
- Wide Voltage, UTC
- Surge protection
- DC12V, IP67



MP-L8JH504M-B	MP-L8JH241M-B	MP-L8JH205M-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 2.8-12mm Motorized Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 2.8-12mm Motorized Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 2.8-12mm Motorized Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night, IR range: 35 ~ 45m
- OSD menu, DNR, Smart IR, ICR
- Wide Voltage, UTC
- Surge protection
- DC12V, IP67



MP-L8QH504M-B	MP-L8QH241M-B	MP-L8QH205M-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 2.8-12mm Motorized Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 2.8-12mm Motorized Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 2.8-12mm Motorized Lens/3.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output Dial line switchable
- True Day/Night, IR range: 35 ~ 45m
- 2.8-12mm Motorized Lens/5.0MP
- OSD menu, DNR, Smart IR, ICR
- Wide Voltage, UTC
- Surge protection
- DC12V, IP67



MP-L8GH504M-B	MP-L8GH241M-B	MP-L8GH205M-B
HD 5.0MP 4-IN-1 · 1/2.9" high-performance CMOS SONY · 2.8-12mm Motorized Lens/5.0MP	HD 2.4MP 4-IN-1 · 1/2.8" high-performance CMOS · 2.8-12mm Motorized Lens/3.0MP	HD 2.1MP 4-IN-1 · 1/2.7" Sony high-performance CMOS SONY · 2.8-12mm Motorized Lens/3.0MP

We Focus on Quality

Plastic Hidden Camera

KEY FEATURES

- AHD/CVI/TVI/CVBS output one-button switching
- True Day/Night
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR.
- Surge protection
- DC12V



MP-P1BH400F-A	MP-P1BSH201F-A	MP-P1BH207F-A	MP-P1BH100F-A
· 4.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/4.0MP · No IR leds	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.6mm Lens/3.0MP · No IR leds	· 2.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP · No IR leds	· 1.0MP 1/4" high-performance CMOS · 3.6mm Lens/2.0MP · No IR leds

KEY FEATURES

- AHD/CVI/TVI/CVBS output one-button switching
- True Day/Night
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR.
- Surge protection
- DC12V



MP-P1CH400N-A MP-P1CH400N8-A MP-P1CH400N9-A	MP-P1CSH201N-A MP-P1CSH201N8-A MP-P1CSH201N9-A	MP-P1CH207N-A MP-P1CH207N8-A MP-P1CH207N9-A	MP-P1CH100N-A MP-P1CH100N8-A MP-P1CH100N9-A
· 4.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/4.0MP · No IR/Visible IR leds/Invisible IR leds	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.7mm 1/2.7 Pinhole Lens/3.0MP · No IR/Visible IR leds/Invisible IR leds	· 2.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/3.0MP · No IR/Visible IR leds/Invisible IR leds	· 1.0MP 1/4" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/2.0MP · No IR/Visible IR leds/Invisible IR leds

KEY FEATURES

- AHD/CVI/TVI/CVBS output one-button switching
- True Day/Night
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR.
- Surge protection
- DC12V



MP-P1EH400N-A MP-P1EH400N8-A MP-P1EH400N9-A	MP-P1ESH201N-A MP-P1ESH201N8-A MP-P1ESH201N9-A	MP-P1EH207N-A MP-P1EH207N8-A MP-P1EH207N9-A	MP-P1EH100N-A MP-P1EH100N8-A MP-P1EH100N9-A
· 4.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/4.0MP · No IR/Visible IR leds/Invisible IR leds	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.7mm 1/2.7 Pinhole Lens/3.0MP · No IR/Visible IR leds/Invisible IR leds	· 2.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/3.0MP · No IR/Visible IR leds/Invisible IR leds	· 1.0MP 1/4" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/2.0MP · No IR/Visible IR leds/Invisible IR leds

KEY FEATURES

- AHD/CVI/TVI/CVBS output one-button switching
- True Day/Night
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR.
- Surge protection
- DC12V



MP-P1FH400N-A MP-P1FH400N8-A MP-P1FH400N9-A	MP-P1FSH201N-A MP-P1FSH201N8-A MP-P1FSH201N9-A	MP-P1FH207N-A MP-P1FH207N8-A MP-P1FH207N9-A	MP-P1FH100N-A MP-P1FH100N8-A MP-P1FH100N9-A
· HD 4.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/4.0MP · No IR/Visible IR leds/Invisible IR leds	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.7mm 1/2.7 Pinhole Lens/3.0MP · No IR/Visible IR leds/Invisible IR leds	· 2.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/3.0MP · No IR/Visible IR leds/Invisible IR leds	· 1.0MP 1/4" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/2.0MP · No IR/Visible IR leds/Invisible IR leds

KEY FEATURES

- Metal Mirror Hidden Camera
- AHD/CVI/TVI/CVBS output one-button switching
- True Day/Night
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR.
- Surge protection
- DC12V



MP-P1GH400F-A	MP-P1GSH201F-A	MP-P1GH207F-A	MP-P1GH100F-A
· 4.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/4.0MP	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.6mm Lens/3.0MP	· 2.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	· 1.0MP 1/4" high-performance CMOS · 3.6mm Lens/2.0MP

Metal MINI Hidden Camera

KEY FEATURES

- AHD/CVI/TVI/CVBS output one-button switching
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR
- Surge protection
- DC12V



MP-W1CH400N	MP-W1CSH201N	MP-W1CH207N	MP-W1CH100N
· 4.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/4.0MP	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.7mm 1/2.7 Pinhole Lens/3.0MP · True WDR	· 2.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/3.0MP	· 1.0MP 1/4" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/2.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output one-button switching
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR
- Surge protection
- DC12V



MP-W2CH400F	MP-W2CSH201F	MP-W2CH207F	MP-W2CH100F
· 4.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/4.0MP	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.6mm Lens/3.0MP · True WDR	· 2.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	· 1.0MP 1/4" high-performance CMOS · 3.6mm Lens/2.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output one-button switching
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR
- Surge protection
- DC12V



MP-W2DH400F	MP-W2DSH201F	MP-W2DH207F	MP-W2DH100F
· 4.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/4.0MP	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.6mm Lens/3.0MP · True WDR	· 2.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP	· 1.0MP 1/4" high-performance CMOS · 3.6mm Lens/2.0MP

KEY FEATURES

- AHD/CVI/TVI/CVBS output one-button switching
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR
- Surge protection
- DC12V



MP-W1EH400F8 MP-W1EH400F9	MP-W1ESH201F8 MP-W1ESH201F9	MP-W1EH207F8 MP-W1EH207F9	MP-W1EH100F8 MP-W1EH100F9
· 4.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/4.0MP · Visible IR leds/Invisible IR leds	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.7mm 1/2.7 Pinhole Lens/3.0MP · True WDR · Visible IR leds/Invisible IR leds	· 2.0MP 1/2.7" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/3.0MP · Visible IR leds/Invisible IR leds	· 1.0MP 1/4" high-performance CMOS · 3.7mm 1/2.7 Pinhole Lens/2.0MP · Visible IR leds/Invisible IR leds

KEY FEATURES

- AHD/CVI/TVI/CVBS output one-button switching
- OSD menu, DNR, Smart IR, ICR, UTC Optional
- Wide Voltage, DWDR
- Surge protection
- DC12V



MP-W2EH400F8 MP-W2EH400F9	MP-W2ESH201F8 MP-W2ESH201F9	MP-W2EH207F8 MP-W2EH207F9	MP-W2EH100F8 MP-W2EH100F9
· 4.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/4.0MP · Visible IR leds/Invisible IR leds	· 2.1MP 1/2.9" high-performance CMOS Sony · 3.6mm Lens/3.0MP · True WDR · Visible IR leds/Invisible IR leds	· 2.0MP 1/2.7" high-performance CMOS · 3.6mm Lens/3.0MP · Visible IR leds/Invisible IR leds	· 1.0MP 1/4" high-performance CMOS · 3.6mm Lens/2.0MP · Visible IR leds/Invisible IR leds

40-80M 4X/10X Zoom AHD/CVI/TVI/CVBS 4-IN-1 Bullet PTZ

KEY FEATURES

- 2.0MP 4-IN-1
- Horizontal:0°~260° continous pan,Vertical:-5°~60°
- Pan speed:12°/S
- IR distance:40-80m
- Output:DC,RS485,BNC



MP-B40M10-H205	MP-B40M4-H205	MP-B40F-H205
· 10X Zoom(5.1-51mm) · IR Distance 80m	· 4X Zoom(2.8-12mm) · IR Distance 40-50m	· 4/6/8/12mm fixed lens · IR distance 30m

3" AHD/CVI/TVI/CVBS 4-IN-1 IR Middle Speed Dome

KEY FEATURES

- 6pcs array infrared LEDs, night vision distance 40m
- Horizon: 0°~355°, Vertical: 0°~90°
- Pan Speed 10°~ 30°/S,Tilt Speed 8°~ 25°/S
- IP66,DC12V



MP-B302F-H205 MP-X302F-H205	MP-B302F-H503 MP-X302F-H503
· 2.0MP Sony 4-In-1 · 5X Zoom(2.7-13.5mm) · IR Distance 40m	· 5.0MP Sony 4-In-1 · 5X Zoom(2.7-13.5mm) · IR Distance 40m

4" Half Metal Case AHD/CVI/TVI/CVBS 4-IN-1 IR Middle/High Speed Dome

KEY FEATURES

- 4pcs OSRAM IR Array LEDs+2pcs Laser LEDs,IR Distance 100M
- 360° all-frame endless rotation
- Middle Speed PTZ 0.1-100°/S,High Speed PTZ 0.1-240°/S
- SUPPORT P2P, PC/IOS/Android remote control
- Preset cruise, pattern scanning,area scanning, 360°horizontal scanning
- Housing:Aluminum die casting shield
- Waterproof:IP66,
- Lighting protection:4000V
- Power Supply:DC12V-2A



MP-B401G2-H205 MP-X401G2-H205	MP-B401H2-H200S MP-X401H2-H200S	MP-B401G2-H504 MP-X401G2-H504
· 2.0MP 4-IN-1(Middle Speed) · 20X Zoom(4.7-84.6mm)(can shows as 36X)	· 2.0MP 4-IN-1 Starlight(High Speed) · 18X Zoom	· 5.0MP 4-IN-1(Middle Speed) · 20X Zoom(4.7-84.6mm)(can shows as 36X)

6"Half Metal Case AHD/CVI/TVI/CVBS 4-IN-1 IR Middle Speed Dome

KEY FEATURES

- 5pcs OSRAM IR Array LEDs+3pcs Laser LEDs,IR Distance 150M
- Medium Speed PTZ 0.1- 40°/S,360° all-frame endless rotation;
- Preset cruise,pattern scanning,area scanning, 360°horizontal scanning,255 preset points
- Housing:Aluminum die casting shield
- Waterproof:IP66,
- Lighting protection:4000V
- Power Supply:DC12V-4A



MP-B603M2-A205 MP-X603M2-A205	MP-B603G2-H205 MP-X603G2-H205
· 2.0MP Sony AHD 2-IN-1(Middle Speed) · 20X Zoom(4.7-94mm)(can shows as 36X)	· 2.0MP Sony 4-IN-1(Middle Speed) · 20X Zoom(5.4-108mm)+16X Digital Zoom · (can shows as 36X)

6" Full Metal Case AHD/CVI/TVI/CVBS 4-IN-1 High Speed Dome

KEY FEATURES

- 7pcs OSRAM IR Array LEDs+3pcs Laser LEDs, IR Distance 300M
- High Speed PTZ 0.1-240°/S, 360° all-frame endless rotation;
- Preset cruise, pattern scanning, area scanning, 360° horizontal scanning, 255 preset points
- Housing: Double shell, Aluminum die casting shield
- Waterproof: IP66,
- Lighting protection: 6000V
- Power Supply: DC12V-4A



MP-B601H2-A20S MP-X601H2-A20S	MP-B601H2-H20S MP-X601H2-H20S	MP-B601H2-H200S MP-X601H2-H200S	MP-B601H3-H200S MP-X601H3-H200S	MP-B601H2-H504 MP-X601H2-H504
· 2.0MP Sony AHD 2-IN-1(High Speed) · 20X Zoom(4.7-94mm)(can shows as 36X)	· 2.0MP Sony 4-IN-1(High Speed) · 20X Zoom(5.4-108mm)(can shows as 36X)	· 2.0MP Sony 4-IN-1 Starlight(High Speed) · 20X Zoom(5.4-108mm)(can shows as 36X)	· 2.0MP Sony 4-IN-1 Starlight(High Speed) · 33X Zoom(can shows as 36X)	· 5.0MP Sony 4-IN-1(High Speed) · 20X Zoom(4.7-94mm)(can shows as 36X)

KEY FEATURES

- High Speed PTZ 0.1-240°/S, 360° all-frame endless rotation
- Preset cruise, pattern scanning, area scanning, 360° horizontal scanning, 255 preset points
- Housing: Double shell, Aluminum die casting shield
- Waterproof: IP66,
- Lighting protection: 6000V
- Power Supply: DC12V-4A



MP-B602H2-H20S MP-X602H2-H20S
· 2.0MP Sony AHD 2-IN-1(High Speed) · 20X Zoom(4.7-94mm)



HD ANALOGUE SERIES - XVR PRO Series

5M- N 4CH | 8CH | 16CH XVR

KEY FEATURES

- H.265 Smart 5M-N 5-in-1 DVR, 5MN preview
- (AHD, TVI, CVI, CVBS, IP)
- Audio: 4ch Audio in & 1ch Audio out,
- Output: 1ch VGA, 1ch HDMI
- HDD: 1*SATA (Up to 8TB)
- Others: 1*RS485,1*RJ45(10M/100M)
- DC 12V 2A Power supply



- 4CH 5M-N 5-in-1 DVR
- Recording: 4*5M-N@8FPS
- Playback: 2*5M-N@8FPS
- Support Max 4pcs IP cameras

- 8CH 5M-N 5-in-1 DVR
- Recording: 8*5M-N@8FPS
- Playback: 8*5M-N@8FPS
- Support Max 4pcs IP cameras

XVR-HGS8104-N1

XVR-HGS8108-N1

KEY FEATURES

- H.265 Smart 5M-N 5-in-1 DVR, 5MN preview
- (AHD, TVI, CVI, CVBS, IP)
- Audio: 4ch Audio in & 1ch Audio out,
- Output: 1ch VGA, 1ch HDMI
- HDD: 1*SATA (Up to 8TB)
- Others: 1*RS485,1*RJ45(10M/100M)



XVR-HGS8104-N2

- 4CH 5M-N 5-in-1 DVR
- Recording: 4*5M-N@8FPS
- Playback: 2*5M-N@8FPS
- Support Max 8pcs IP cameras
- DC 12V 2A Power supply

XVR-HGS8108-N2

- 8CH 5M-N 5-in-1 DVR
- Recording: 8*5M-N@8FPS
- Playback: 8*5M-N@8FPS
- Support Max 8pcs IP cameras
- DC 12V 2A Power supply

XVR-HGS8216-N2

- 16CH 5M-N 5-in-1 DVR
- Recording: 16*5M-N@6fps
- Playback: 16*5M-N@6fps
- Support Max 12pcs IP cameras
- DC 12V 3A Power supply

5MP 4CH | 8CH | 16CH XVR

KEY FEATURES

- H.265 Smart 5MP 5-in-1 DVR, 5M preview
- (AHD, TVI, CVI, CVBS, IP)
- Audio: 4ch Audio in & 1ch Audio out
- Output: 1ch VGA, 1ch HDMI
- HDD: 1*SATA (Up to 8TB)
- Others: 1*RS485,1*RJ45(10M/100M)



- 4CH 5MP 5-in-1 DVR
- Recording: 4*5MP@6FPS
- Playback: 2*5MP@6FPS
- Support Max 4pcs IP cameras
- DC 12V 2A Power supply

- 8CH 5MP 5-in-1 DVR
- Recording: 8*5MP@6FPS
- Playback: 4*5MP@6FPS
- Support Max 8pcs IP cameras
- DC 12V 2A Power supply

XVR-HGL8104-N1

XVR-HGL8108-N1

KEY FEATURES

- H.265 Smart 5MP 5-in-1 DVR, 5M preview
- (AHD, TVI, CVI, CVBS, IP)
- Audio: 4ch Audio in & 1ch Audio out
- Output: 1ch VGA, 1ch HDMI
- HDD: 1*SATA (Up to 8TB)
- Others: 1*RS485,1*RJ45(10M/100M)



XVR-HGL8104-N2

- 4CH 5MP 5-in-1 DVR
- Recording: 4*5MP@6FPS
- Playback: 2*5MP@6FPS
- Support Max 4pcs IP cameras
- DC 12V 2A Power supply

XVR-HGL8108-N2

- 8CH 5MP 5-in-1 DVR
- Recording: 8*5MP@6FPS
- Playback: 4*5MP@6FPS
- Support Max 8pcs IP cameras
- DC 12V 2A Power supply

XVR-HGL8216-N2

- 16CH 5MP 5-in-1 DVR
- Recording: 16*5MP@6fps
- Playback: 4*5MP@6fps
- Support Max 16pcs IP cameras
- DC 12V 4A Power supply

1080N | 5M-N 32CH XVR

KEY FEATURES

- H.265 Smart 32CH 5-in-1 DVR
- (AHD, TVI, CVI, CVBS, IP)
- Audio: 16ch Audio in & 1ch Audio out,
- Output: 1ch VGA, 1ch HDMI
- HDD: 4*SATA (Up to 8TB)
- Others: 1*RS485,1*RJ45(10M/100M)
- Support Max 32pcs IP cameras
- DC 12V 6A/ATX Power supply



XVR-HLM8432-N2

- 32CH 1080N 5-in-1 DVR, 1080N preview
- Recording: 32*1080N@15fps
- Playback: 16*1080N@15fps

XVR-HGS8432-N2

- 32CH 5M-N 5-in-1 DVR, 5MN preview
- Recording: 32*5M-N@6fps
- Playback: 16*5M-N@6fps

1080N 4CH | 8CH | 16CH XVR

KEY FEATURES

- H.264 Smart 1080N 6-in-1 DVR, 1080N preview
- (AHD, TVI, CVI, XVi, CVBS, IP)
- Audio: 2/4ch Audio in & 1ch Audio out
- Output: 1ch VGA, 1ch HDMI
- Others: 1*RS485,1*RJ45(10M/100M)



XVR-TLM5104	XVR-TLM5108	XVR-TLM5116	XVR-TLM5216
· 4CH 1080N 6-in-1 DVR · 4*1080N@25FPS · 4ch Playback;1 SATA (up to 8TB) · Support Max 12pcs IP cameras · DC 12V 2A Power supply	· 8CH 1080N 6-in-1 DVR · 8*1080N@12fps/ 4*1080P@15fps · 4ch Playback;1 SATA (up to 8TB) · Support Max 16pcs IP cameras · DC 12V 2A Power supply	· 16CH 1080N 6-in-1 DVR · 16*1080N@12fps / 8*1080N@25fps · 16ch Playback;1 SATA (up to 8TB) · 2ch Audio in & 1ch Audio out, · Support Max 16pcs IP cameras · DC 12V 2A Power supply	· 16CH 1080N 6-in-1 DVR · 16*1080N@12fps / 8*1080N@25fps · 16ch Playback;2 SATA (up to 8TB) · 2ch Audio in & 1ch Audio out · Support Max 16pcs IP cameras · DC 12V 4A Power supply

5M-N 4CH | 8CH | 16CH XVR

KEY FEATURES

- H.265 Smart 5M-N 6-in-1 DVR, 5MN preview
- (AHD, TVI, CVI, XVi, CVBS, IP)
- Audio: 1/2ch Audio in & 1ch Audio out
- Output: 1ch VGA, 1ch HDMI
- Others: 1*RS485,1*RJ45(10M/100M)



XVR-TMH8104	XVR-LME8108	XVR-LME8116	XVR-LME8216
· 4CH 5M-N 6-in-1 DVR · 4*5M-N@15fps / 4*4M-N@15fps / 4*1080N · 2ch playback;1 SATA(up to 8TB) · Support Max 16pcs IP cameras · DC 12V 2A Power supply	· 8CH 5M-N 6-in-1 DVR · 8*5M-N@6fps / 8*4M-N@8fps / 8*1080P@8fps/4*1080P@18fps · 4ch playback;1 SATA(up to 8TB) · Support Max 16pcs IP cameras · DC 12V 2A Power supply	· 16CH 5M-N 6-in-1 DVR · 16*5M-N@6fp/ 16*4M-N@8fps /16*1080P@8fps/ 8*1080N · 16ch playback;1 SATA(up to 8TB) · Support Max 16pcs IP cameras · DC 12V 2A Power supply	· 16CH 5M-N 6-in-1 DVR · 16*5M-N@6fp/ 16*4M-N@8fps /16*1080P@8fps/ 8*1080N · 16ch playback;2 SATA(up to 8TB) · 2ch audio in & 1ch audio out · Support Max 16pcs IP cameras · DC 12V 2A Power supply

5MP 4CH | 8CH | 16CH XVR

KEY FEATURES

- H.265 Smart 5M 6-in-1 DVR, 5M preview
- (AHD, TVI, CVI, XVi, CVBS, IP)
- Audio: 1ch / 2ch Audio in & 1ch Audio out
- Output: 1ch VGA, 1ch HDMI
- Others: 1*RS485,1*RJ45(10M/100M)



XVR-TGS8104	XVR-TGS8108	XVR-TGS8116	XVR-TGS8216
· 4CH 4K-N(5M-P) 6-in-1 DVR · 4*4K-N@7fps / 4*5M@6fps /4*4M@8fps /4*3M@10fps /4*1080P@18fps · 4ch playback,1 SATA(up to 8TB) · Support Max 16pcs IP cameras · DC 12V 2A Power supply	· 8CH 4K-N(5M-P) 6-in-1 DVR · 8*4K-N@7fps /8*5M@6fps /8*4M@8fps /8*3M@10fps /8*1080P@18fps · 8ch playback,1 SATA(up to 8TB) · Support Max 16pcs IP cameras · DC 12V 2A Power supply	· 16CH 4K-N(5M-P) 6-in-1 DVR · 16*4K-N@7fps/ 16*5M@6fps /16*4M@8fps /16*3M@10fps /16*1080P@12fps · 16ch playback,1 SATA(up to 8TB) · 2ch audio in & 1ch audio out · Support Max 16pcs IP cameras · DC 12V 2A Power supply	· 16CH 4K-N(5M-P) 6-in-1 DVR · 16*4K-N@7fps/ 16*5M@6fps /16*4M@8fps /16*3M@10fps /16*1080P@12fps · 16ch playback,2 SATA(up to 8TB) · 2ch audio in & 1ch audio out · Support Max 16pcs IP cameras · DC 12V 4A Power supply

4K 4CH | 8CH XVR

KEY FEATURES

- H.265 Smart 4K 6-in-1 DVR, 5MN preview
- (AHD, TVI, CVI, XVi, CVBS, IP)
- Audio: 4ch Audio in & 1ch Audio out
- Output: 1ch VGA, 1ch HDMI
- HDD: 1*SATA (Up to 8TB)
- Others: 1*RS485,1*RJ45(10M/100M)



XVR-TGL8104	XVR-TGL8108
· 4CH 4K 6-in-1 DVR · 4*8M@8fps(AHD) /4*5M@14fps/ 4*4M@18fps /4*3M@21fps/ 4*1080P · 4ch playback · Support Max 16pcs IP cameras · DC 12V 2A Power supply	· 8CH 4K 6-in-1 DVR · 8*8M@8fps(AHD) /8*5M@14fps /8*4M@18fps /8*3M@21fps/8*1080P · 8ch playback · Support Max 8pcs IP cameras · DC 12V 2A Power supply

1080N | 5M-N 32CH XVR

KEY FEATURES

- H.265 Smart 1080N 6-in-1 DVR, 1080N preview
- (AHD, TVI, CVI, XVi, CVBS, IP)
- Audio: 16ch Audio in & 1ch Audio out
- Output: 1ch VGA, 1ch HDMI
- Others: 1*RS485, 1*RJ45(10M/100M)
- 32CH 1080N 6-in-1 DVR
- 32*1080N@15fps / 24*1080N@15fps / 16*1080N
- 8ch Playback
- Support Max 32pcs IP cameras
- 8ch Alarm in&1ch Alarm out
- DC 12V 4A/6A/ATX Power supply



XVR-5232N

Support 2 HDD

XVR-5432N

Support 4 HDD

XVR-5832N

Support 8 HDD

KEY FEATURES

- H.265 Smart 5M-N DVR, 5M preview
- (AHD, TVI, CVI, XVi, CVBS, IP)
- Audio: 16ch Audio in & 1ch Audio out
- Output: 1ch VGA, 1ch HDMI
- Others: 1*RS485, 1*RJ45(10M/100M)
- 32CH 4K-N(5M-P) 6-in-1 DVR
- 32*4M@8fps / 32*5M@6fps / 32*4K-N@7fps
- 16ch playback
- 8ch alarm in & 1ch alarm out
- Support Max 32pcs IP cameras
- DC 12V 4A/6A/ATX Power supply



XVR-TGS8232


Support 2 HDD

XVR-TGS8432

Support 4 HDD

XVR-TGS8832

Support 8 HDD

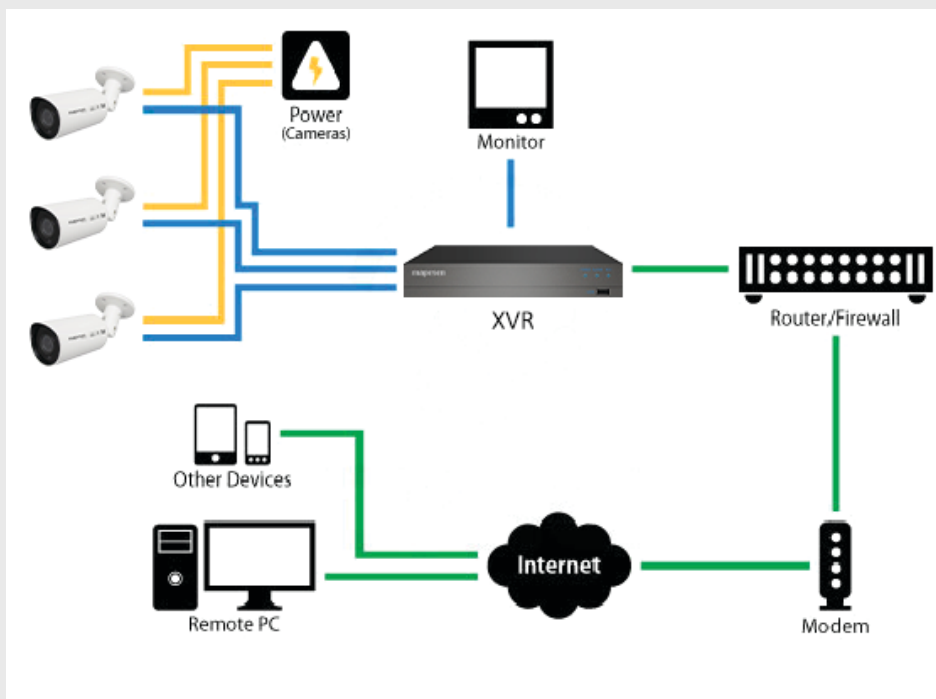

Professional CCTV System



- . AI + Surveillance Camera
- . Support face recognition, contrast and snapshot
- . Support black and white list setting
- . H.265/H.264, 2.0MP/5.0MP
- . Super WDR, Ultra low illumination
- . Support ONVIF



- . AI + Surveillance Camera
- . Support face recognition, contrast and snapshot
- . Support black and white list setting
- . H.265/H.264, 2.0MP/5.0MP
- . Super WDR, Ultra low illumination
- . Support ONVIF



- . AI + Surveillance Camera
- . Support face recognition, contrast and snapshot
- . Support black and white list setting
- . H.265/H.264, 2.0MP/5.0MP
- . Super WDR, Ultra low illumination
- . Support ONVIF



Smart Motion Lightning Wifi Standalone SD I TF Card Camera

KEY FEATURES

- Smart Motion Lightning WIFI STANDALONE SD CARD CAMERA
- Adopt megapixel CMOS sensor,very low power consumption,super stable
 - H.264/H.265 encoding
 - Support manual setting time zone of phone and synchronize to device
 - Support Wi-Fi 802.11 b/g/n
 - Audio Compression G.711
 - Support motion detection alarm
 - Hotspot/Broadcast/Scanning QR code AP
 - Support two-way audio,built-in speaker/Microphone
 - Fix lens;super night vision
 - Storage interface:1 TF(Micro SD)storage interface,max64G/128G
 - Support dual-stream simultaneously monitoring;
 - Support CMS,P2P
 - IP66



MP-L1J4I03L-WTA2	MP-L1J4I05L-WTA2	MP-L1J4I212L-WTA2	MP-L1J4I213L-WTA2	MP-L1J5I216SL-WTA2	MP-L1J4I300L-WTA2
· 1.0MP 1/4" CMOS · H.264 encoding,720P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P @25/30fps · Support 1pc SD/TF card Max 128GB	· 2.0MP 1/2.8" SONY CMOS (can be Starlight),Hisilicon DSP · H.265/H.264 encoding, 1080P@20fps · Support 1pc SD/TF card Max 64GB	· 3.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding,3.0MP @20fps · Support 1pc SD/TF card Max 64GB

Wifi Standalone SD I TF Card Camera

KEY FEATURES

- WIFI Standalone SD Card Dome Camera (TF/SD Card Inside)
- Adopt megapixel CMOS sensor,very low power consumption,super stable;
 - H.264/H.265 encoding;
 - Support manual setting time zone of phone and synchronize to device;
 - Support Wi-Fi 802.11 b/g/n;
 - Audio Compression G.711
 - Support motion detection alarm;
 - Hotspot/Broadcast/Scanning QR code AP;
 - Fix lens;super night vision;
 - Storage interface:1 TF(Micro SD)storage interface,max64G/128G;
 - Support dual-stream simultaneously monitoring;
 - Support CMS,P2P
 - IP67



MP-F1B4I03-WT	MP-F1B4I05-WT	MP-F1B4I212-WT	MP-F1B4I213-WT	MP-F1B5I216S-WT	MP-F1B4I300-WT
· 1.0MP 1/4" CMOS · H.264 encoding,720P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P @25/30fps · Support 1pc SD/TF card Max 128GB	· 2.0MP 1/2.8" SONY CMOS (can be Starlight),Hisilicon DSP · H.265/H.264 encoding, 1080P@20fps · Support 1pc SD/TF card Max 64GB	· 3.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding,3.0MP @20fps · Support 1pc SD/TF card Max 64GB

KEY FEATURES

- WIFI Standalone SD Card Bullet Camera (TF/SD Card Inside)
- Adopt megapixel CMOS sensor,very low power consumption,super stable;
 - H.264/H.265 encoding;
 - Support manual setting time zone of phone and synchronize to device;
 - Support Wi-Fi 802.11 b/g/n;
 - Audio Compression G.711
 - Support motion detection alarm;
 - Hotspot/Broadcast/Scanning QR code AP;
 - Built-in Microphone;
 - Fix lens;super night vision;
 - Storage interface:1 TF(Micro SD)storage interface,max64G/128G;
 - Support dual-stream simultaneously monitoring;
 - Support CMS,P2P
 - IP67



MP-L2J4I03-WTA	MP-L2J4I05-WTA	MP-L2J4I212-WTA	MP-L2J4I213-WTA	MP-L2J5I216S-WTA	MP-L2J4I300-WTA
· 1.0MP 1/4" CMOS · H.264 encoding,720P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P@25/30fps · Support 1pc SD/TF card Max 128GB	· 2.0MP 1/2.8" SONY CMOS(can be Starlight), Hisilicon DSP · H.265/H.264 encoding,1080P@20fps · Support 1pc SD/TF card Max 64GB	· 3.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding, 3.0MP@20fps · Support 1pc SD/TF card Max 64GB

Wifi Standalone SD I TF Card Camera

KEY FEATURES

WIFI Standalone SD Card Bullet Camera (TF/SD Card External)

- Adopt megapixel CMOS sensor,very low power consumption,super stable
- H.264/H.265 encoding
- Support manual setting time zone of phone and synchronize to device
- Support Wi-Fi 802.11 b/g/n
- Audio Compression G.711
- Support motion detection alarm
- Hotspot/Broadcast/Scanning QR code AP
- Support two-way audio,built-in speaker/Microphone
- Fix lens;super night vision
- Storage interface:1 TF(Micro SD)storage interface,max64G/128G
- Support dual-stream simultaneously monitoring
- Support CMS,P2P
- IP67



MP-L1K4I103-WTA2	MP-L1K4I205-WTA2	MP-L1K4I212-WTA2	MP-L1K4I213-WTA2	MP-L1K5I216S-WTA2	MP-L1K4I300-WTA2
· 1.0MP 1/4" CMOS · H.264 encoding,720P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P @25/30fps · Support 1pc SD/TF card Max 128GB	· 2.0MP 1/2.8" SONY CMOS (can be Starlight),Hisilicon DSP · H.265/H.264 encoding, 1080P@20fps · Support 1pc SD/TF card Max 64GB	· 3.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding,3.0MP @20fps · Support 1pc SD/TF card Max 64GB

KEY FEATURES

WIFI Standalone SD Card Bullet Camera (TF/SD Card External)

- Adopt megapixel CMOS sensor,very low power consumption,super stable
- H.264/H.265 encoding
- Support manual setting time zone of phone and synchronize to device
- Support Wi-Fi 802.11 b/g/n
- Audio Compression G.711
- Support motion detection alarm
- Hotspot/Broadcast/Scanning QR code AP
- Support two-way audio,built-in speaker/Microphone
- Fix lens;super night vision
- Storage interface:1 TF(Micro SD)storage interface,max64G/128G
- Support dual-stream simultaneously monitoring
- Support CMS,P2P
- IP67



MP-L1J4I103-WTA2	MP-L1J4I205-WTA2	MP-L1J4I212-WTA2	MP-L1J4I213-WTA2	MP-L1J5I216S-WTA2	MP-L1J4I300-WTA2
· 1.0MP 1/4" CMOS · H.264 encoding,720P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P @25/30fps · Support 1pc SD/TF card Max 128GB	· 2.0MP 1/2.8" SONY CMOS (can be Starlight),Hisilicon DSP · H.265/H.264 encoding, 1080P@20fps · Support 1pc SD/TF card Max 64GB	· 3.0MP 1/2.7" CMOS, Hisilicon DSP · H.264 encoding,3.0MP @20fps · Support 1pc SD/TF card Max 64GB

KEY FEATURES

WIFI Standalone SD Card Bullet Camera (TF/SD Card External)

- Adopt megapixel CMOS sensor,very low power consumption,super stable
- H.264/H.265 encoding
- Support manual setting time zone of phone and synchronize to device
- Support Wi-Fi 802.11 b/g/n
- Audio Compression G.711
- Support motion detection alarm
- Hotspot/Broadcast/Scanning QR code AP
- Built-in Microphone
- Manual Varifocal lens(2.8-12mm);super night vision
- Storage interface:1 TF(Micro SD)storage interface,max64G
- Support dual-stream simultaneously monitoring
- Support CMS,P2P
- IP67



MP-L8Q4I103V-WTA	MP-L8Q4I205V-WTA	MP-L8Q4I212V-WTA	MP-L8Q5I216V-WTA	MP-L8Q4I300V-WTA
· 1.0MP 1/4" CMOS · H.264 encoding,720P@20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.7" CMOS,Hisilicon DSP · H.264 encoding,1080P@20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS, Hisilicon DSP · H.264 encoding,1080P@20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.8" SONY CMOS(can be Starlight),Hisilicon DSP · H.265/H.264 encoding,1080P @20fps · Support 1pc SD/TF card Max 64GB	· 3.0MP 1/2.7" CMOS,Hisilicon DSP · H.264 encoding,3.0MP@20fps · Support 1pc SD/TF card Max 64GB

Wifi Standalone SD I TF Card Camera

KEY FEATURES

- WIFI Standalone SD Card Bullet Camera (TF/SD Card External)
- Adopt megapixel CMOS sensor;very low power consumption,super stable
 - H.264/H.265 encoding
 - Support manual setting time zone of phone and synchronize to device
 - Support Wi-Fi 802.11 b/g/n
 - Audio Compression G.711
 - Support motion detection alarm
 - Hotspot/Broadcast/Scanning QR code AP
 - Built-in Microphone
 - Motorized Varifocal lens(2.8-12mm);super night vision
 - Storage interface:1 TF(Micro SD)storage interface,max64G
 - Support dual-stream simultaneously monitoring
 - Support CMS,P2P
 - IP66



MP-L8Q4I212M-WTA	MP-L8Q5I216SM-WTA
· 2.0MP 1/2.9" SONY CMOS,Hisilicon DSP · H.264 encoding,1080P@20fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.8" SONY CMOS(can be Starlight),Hisilicon DSP · H.265/H.264 encoding,1080P@20fps · Support 1pc SD/TF card Max 64GB

Wifi Standalone PT SD I TF Card Camera(Fix Lens)

KEY FEATURES

- WIFI Standalone SD Card PT Bullet Camera (TF/SD Card External)
- Adopt highly integrated SOC processor and megapixel CMOS sensor;very low power consumption,super stable
 - Field angle:horizontal 79°/vertical 55°
 - Support manual setting time zone of phone and synchronize to device
 - Support Wi-Fi 802.11 b/g/n
 - Audio Compression G.711
 - Support motion detection alarm
 - Hotspot/Broadcast/Scanning QR code AP
 - Two-way audio,with auto cancellation;built-in speaker/Microphone
 - Storage interface:1 TF(Micro SD)storage interface,max64G; 2.0MP,max 128G
 - Support dual-stream simultaneously monitoring
 - Support CMS,P2P
 - IP66



MP-P8D4I133-WTA2	MP-P8D4I213-WTA2
· 1.3MP 1/3" CMOS,Hisilicon DSP · H.264 encoding,960P@25fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS,Hisilicon DSP · H.264 encoding,1080P@25/30fps · Support 1pc SD/TF card Max 128GB

Wifi Standalone PTZ SD I TF Card Camera(Auto-focus 4x Zoom)

KEY FEATURES

- WIFI Standalone SD Card PTZ Bullet Camera (TF/SD Card External)
- Adopt highly integrated SOC processor and megapixel CMOS sensor;very low power consumption,super stable
 - Field angle:horizontal 89°-64°/vertical 29°-21.6°
 - Support manual setting time zone of phone and synchronize to device
 - Support Wi-Fi 802.11 b/g/n
 - Audio Compression G.711
 - Support motion detection alarm
 - Hotspot/Broadcast/Scanning QR code AP
 - Two-way audio,with auto cancellation;built-in speaker/Microphone
 - Storage interface:1 TF(Micro SD)storage interface,max64G; 2.0MP,max128G
 - Support dual-stream simultaneously monitoring
 - Support CMS,P2P
 - IP66



MP-P8D4I133M-WTA2	MP-P8D4I213M-WTA2
· 1.3MP 1/3" CMOS,Hisilicon DSP · H.264 encoding,960P@25fps · Support 1pc SD/TF card Max 64GB	· 2.0MP 1/2.9" SONY CMOS,Hisilicon DSP · H.264 encoding,1080P@25/30fps · Support 1pc SD/TF card Max 128GB